



— 2015 INFLATABLE BOATS —




At Achilles, the process of providing boaters with the highest quality inflatable boats in the world begins with manufacturing our own industry-leading CSM fabric and ends with providing Achilles owners unsurpassed customer service.

The quality of Achilles CSM Fabric has such a great reputation in the inflatable industry that many other inflatable boat manufacturers around the world buy it from us to use on their boats. But we do not stop at producing our own tough, airtight fabric that is virtually impervious to the elements, oil, gasoline and abrasions. We take the extra time and expense to build in the finest safety and performance features other manufacturers do not, such as our exclusive 4-layer overlapped seam construction. We meticulously design all our boats to deliver unsurpassed performance while outfitting each one with a comprehensive array of quality standard features you will not find on other inflatables. When you compare the design and features of any Achilles boat with any competing model, you will understand why we own a well-deserved reputation for quality forged over the last 40 years.


With Achilles, quality doesn't stop with the sale. We provide both customers and dealers alike with comprehensive and responsive post-sales support in every aspect of Achilles ownership. Our customer-friendly web site not only offers comprehensive information on our current models, but also on all Achilles boats produced since 1978.

When you choose an Achilles, you will come away with a high quality inflatable boat and an ongoing relationship with a company committed to its customers.

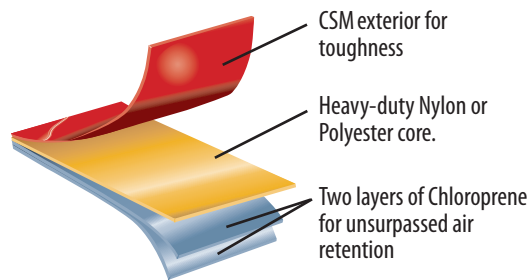

CSM exterior for toughness
Heavy-duty Nylon or Polyester core.
Two layers of Chloroprene for unsurpassed air retention

UNSURPASSED SEAM CONSTRUCTION




Our seams are overlapped a full inch and reinforced with seam tape both inside and out. No one else takes so many steps to ensure seams will last.

NON-CORROSIVE CHECK VALVES



All Achilles valves are non-corrosive with no moving parts that might break. They are engineered for easy "one-way" inflation and instant deflation.

A SMOOTH, SIMPLE OAR SYSTEM



We invented the fold-down, locking oar system that makes rowing a breeze while keeping oars secured and out of the way when not in use.



Great quality in compact packages that are easy to carry, store and inflate.

A functional, versatile, sporty lineup offering a variety of floor and design options.

New for 2015!

HB-310AL

Our first aluminum-hulled inflatable tender incorporates the great features and performance of our fiberglass rigid hull inflatables.

See page 9



HB310-AL



LSR-290E

LSI-230E

Our smallest inflatable floor tender now has an air keel for improved performance. See page 7



LSR-E Series

Our aluminum rollup floor series is redesigned to look and perform better than ever. See page 5

FULL FIVE-YEAR WARRANTY ON FABRIC AND SEAMS
We back our claim to having superior fabric and construction with a strong warranty commitment.



ACHILLES WORK AND RESCUE BOATS

Achilles produces heavy-duty workboats and rapid deployment rescue boats. Call or email us for our Commercial Boat catalog.



ACHILLES RIVERBOATS

Achilles produces a complete line of CSM riverboats. Call or email us for our riverboat brochure.

New! HB-AL Series

HB-FX Series

HB-LX Series


HB-DX Series

FRB Series

SGX Series

SG Series

Su Series

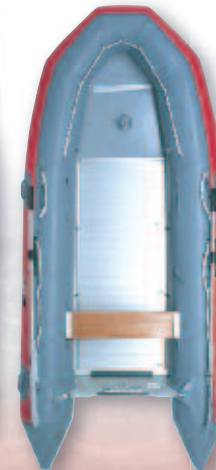

Choose from the industry's most complete lineup of open RIB's.

High performance inflatable boats for work, play and anything in between

**DINGHY
SERIES**

LT

These two and four-person boats go from their handy carry bags to fully equipped dinghies in just minutes. Compact enough to be stored virtually anywhere, they are safe, durable and dependable dinghies capable of carrying substantial loads. They come ready to work with fold-down oar system, wood seat, fold-up floor and motor mount. Even though they are our most economical boats, they are made with the same durable Achilles CSM fabric and four-layer seam construction, and backed by the same five-year warranty as our large sport boats.



A lot of quality in a compact package.



LT-2

The LT-4 has a heavy-duty removable motor mount that fits quickly and securely into molded rubber mounting attachments.


LT STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; wood/ Achilles CSM roll-up floor (LT4); hinged wood floor (LT2); full-length rubbing strake; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; bow D-ring (LT2); towing bridle D-rings (LT4); life lines with hand loops; removable wood rowing seat; motor mount; foot pump; carry bag; and maintenance kit.
*See pages 17 and 18.

	LT-2	LT-4
Color	Lt. Gray	Lt. Gray
Length	7'3" (220 cm)	8'6" (260 cm)
Inside Length	5' (153 cm)	6'2" (188 cm)
Beam	4'1" (124 cm)	4'8" (142 cm)
Inside Beam	1'11" (58 cm)	2'2" (66 cm)
Tube Diameter	13" (33 cm)	15" (38 cm)
Weight	37 lbs (16.5 kg)	57 lbs (26 kg)
Load Capacity	640 lbs (290 kg)	970 lbs (440 kg)
Person Capacity	2	4*
Recommended H.P.	3 (2-3) Standard	3 (2-3) Standard
Maximum H.P.	3 Standard	3 Standard
Air Chambers	2	2

**ROLLUP TENDER
SERIES**

LS-RU

Both our LS-RU rollup tenders can be stowed in a space just 10" high. With a roll-up wood/Achilles CSM fabric floor and solid transom, they can be inflated and ready to go in minutes. When they are, they deliver surprisingly large load and person capacities. Easy to carry, easy to set up, easy to store – the LS-RU.

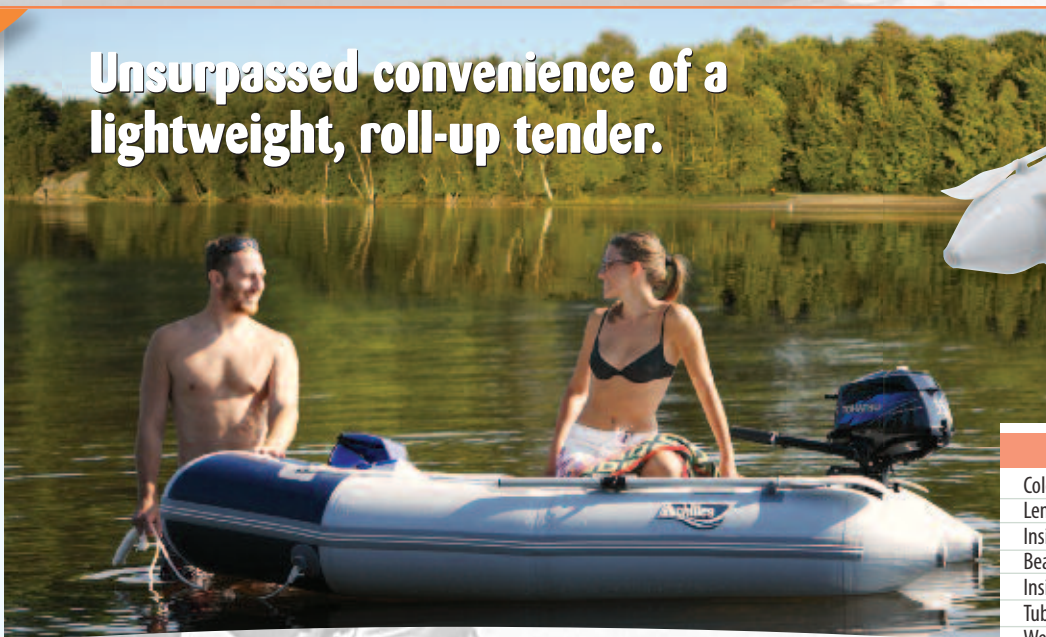

Unsurpassed convenience of a lightweight, roll-up tender.



LS4-RU

LS-RU STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; wood/CSM roll-up floor; full-length rubbing strake; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; protective motor clamp plate; removable wood rowing seat; bailer valve; life lines; towing bridle D-rings; foot pump; carry bag; and maintenance kit.

	LS2-RU	LS4-RU
Color	Lt. Gray/Navy Blue	Lt. Gray/Navy Blue
Length	7'6" (228 cm)	8'8" (265 cm)
Inside Length	5'1" (156 cm)	6'1" (185 cm)
Beam	4'4" (132 cm)	4'8" (142 cm)
Inside Beam	2' (62 cm)	2'2" (66 cm)
Tube Diameter	14" (35 cm)	15" (38 cm)
Weight	57 lbs (25.5 kg)	66 lbs (30 kg)
Load Capacity	620 lbs (280 kg)	840 lbs (380 kg)
Person Capacity	2	4*
Recommended H.P.	4 (2-4) Standard	4 (2-6) Standard
Maximum H.P.	4 Standard	6 Standard
Air Chambers	2	2

*See pages 17 and 18.

These timeless tenders still offer boaters the classic inflatable look and functionality that has made them so popular.



SPORT TENDER
SERIES

LEX



LEX boats represent the culmination of many subtle refinements over the years that have kept them current while maintaining their traditional appearance. A sleek bow design and ample interior space come together in this classic tender. A teardrop rub strake deflects spray and improves protection from the inevitable collisions with docks and boat hulls.

Additional features include a painted wood seat and a full sectional wood floor. They all add up to a solid, reliable tender that combines practicality and performance in an economical package.

	LEX-77	LEX-88	LEX-96
Color	Lt. Gray	Lt. Gray	Lt. Gray
Length	7'7" (230 cm)	8'8" (265 cm)	9'6" (290 cm)
Inside Length	4'11" (149 cm)	5'11" (180 cm)	6'9" (205 cm)
Beam	4'9" (144 cm)	4'9" (144 cm)	4'9" (144 cm)
Inside Beam	2'2" (66 cm)	2'2" (66 cm)	2'2" (66 cm)
Tube Diameter	15.5" (39 cm)	15.5" (39 cm)	15.5" (39 cm)
Weight	62 lbs (28 kg)	69 lbs (31 kg)	74 lbs (33.5 kg)
Load Capacity	730 lbs (330 kg)	900 lbs (410 kg)	990 lbs (450 kg)
Person Capacity	2	4*	4
Recommended H.P.	4 (2-4) Standard	4 (2-6) Standard	6 (2-8) Standard
Maximum H.P.	4 Standard	6 Standard	8 Standard
Air Chambers	2 & Keel	2 & Keel	2 & Keel

LEX STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four layer seam construction; air keel; wood floorboards; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; full-length teardrop rubbing strake; removable wood rowing seat; foot pump; towing bridle D-rings; protective transom motor clamp plate; life lines; bailer valve; carry bag; and maintenance kit. *See pages 17 and 18.



LEX-88

LSR-E



We've added a new, sleek lateral seam tube design to these super convenient boats that feature a unique aluminum rollup floor which makes it a snap to get them in and out of the water quickly and easily. This is combined with an inflatable keel and V-shaped fiberglass-encased transom to enhance performance. Large 17" tubes allow the LSR tenders to carry heavy loads. Add in the improved buoyancy, extra load capacity and smoother planing provided by the Performax end cone design, and you have a roll-up tender that is tough to beat.

Our Popular Aluminum Floor Rollups
have been redesigned to look and perform
even better!



Quick, easy assembly



LSR-290E



	LSR-290E	LSR-310E
Color	Lt. Gray	Lt. Gray
Length	9'6" (290 cm)	10'2" (310 cm)
Inside Length	6'9" (205 cm)	7'3" (220 cm)
Beam	5'2" (158 cm)	5'2" (158 cm)
Inside Beam	2'4" (72 cm)	2'4" (72 cm)
Tube Diameter	17" (43 cm)	17" (43 cm)
Weight	97 lbs (44 kg)	101 lbs (46 kg)
Load Capacity	1,100 lbs (500 kg)	1,190 lbs (540 kg)
Person Capacity	4	4
Recommended H.P.	6 (4-8) Standard	8 (4-10) Standard
Maximum H.P.	8 Standard	10 Standard
Air Chambers	2 & Keel	3 & Keel

LSR STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; air keel; aluminum roll-up floor; fiberglass encased v-shaped transom; full length teardrop rubbing strake; bow carry handle; interior bow lifting D-ring; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; towing bridle D-rings; life lines; removable wood rowing seat; extra seat attachment patches; rear carry handles; protective motor clamp plate; bailer valve; foot pump; carry bag; and maintenance kit.

SPD-E

This longtime lineup staple is now better than ever.



SPD-290E



We have never stopped making our SPD boats better which is why they have remained popular with boaters for so long. That commitment to innovation and improvement has continued with tube and floor design enhancements. New lateral seam tube construction gives these classic inflatables a more modern, stylish design. Rope life-lines have been replaced with webbed handles and helmsman grip for a cleaner appearance. The three rear floorboards that bear the brunt of abuse are now aluminum to decrease maintenance and increase durability.

The classic features that make these boats so desirable remain such as large diameter tubes for greater load capacity and better performance, a removable wood rowing seat and an air keel/floor joint system that deliver a more rigid floor.

Performax end cones perform better with today's heavier 4-stroke motors.



SPD-290E

	SPD-290E	SPD-310E	SPD-330E
Color	Lt. Gray	Lt. Gray	Lt. Gray
Length	9'6" (290 cm)	10'2" (310 cm)	10'8" (325 cm)
Inside Length	6'9" (205 cm)	7'3" (220 cm)	7'5" (226 cm)
Beam	5'2" (158 cm)	5'2" (158 cm)	5'6" (168 cm)
Inside Beam	2'4" (72 cm)	2'4" (72 cm)	2'7" (78 cm)
Tube Diameter	17" (43 cm)	17" (43 cm)	18" (45 cm)
Weight	106 lbs (48 kg)	110 lbs (50 kg)	120 lbs (54.5 kg)
Load Capacity	1100 lbs (500 kg)	1190 lbs (540 kg)	1300 lbs (590 kg)
Person Capacity	4	4	5
Recommended H.P.	6 (4-8) Standard	8 (4-10) Standard	15 (4-15) Standard
Maximum H.P.	8 Standard	10 Standard	20 Standard
Air Chambers	2 & Keel	3 & Keel	3 & Keel

SPD STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; aluminum and wood floorboards; aluminum stringers and floorboard joints; air keel; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; bow handle and towing D-rings; interior bow lifting D-ring; removable wood rowing seat with foam mat; stern mounted strap lift and carry handles and a webbed helmsman grip; extra seat attachment patches; full length teardrop rubbing strake; fiberglass coated v-shaped transom; bailer valve; foot pump; carry bag (2 bags for the SPD-330E); and maintenance kit.

LSI-E



The world's best high-pressure AirFirm™ floor tenders continue to lead the industry in innovation, styling and performance. For 2015, we have added an air keel to our 7'7" LSI-230E, improving the performance of the smallest LSI in our lineup. The lateral seam tube design gives our LSI boats a sleek, clean, modern look and their enhanced polyester core CSM fabric floors are firm and tough.



LSI-260E



Our Achilles high pressure, CSM drop-stitch AirFirm™ floors continue to provide the industry's toughest air decks. When you consider the abuse floors take from scrapes, the sun, salt water, oil and gasoline, it makes sense to have the toughest material available to protect them. And besides being durable, their unique construction consisting of thousands of polyester threads makes these floors remarkably rigid and incredibly lightweight as well.

Achilles high-pressure CSM drop-stitch AirFirm™ floors provide superior rigidity.



LSI-260E

**NEW Air Keel
on LSI-230E
for 2015**

**Performax end cones perform better
with today's heavier 4-stroke motors.**



LSI-230E

The result is not only a more stylish tender, but also one that outperforms other air floor models by a wide margin. The combination of Performax tubes engineered to work efficiently with today's heavier 4-stroke motors, air keel, and a stiffer air floor result in a smoother handling and better performing boat. And the longer waterline resulting from Performax tubes allows these boats to plane even quicker and to stay on a plane at slower speeds.



LSI-290E



LSI-290E

**Extra Seat Attachment
Patches are Standard
on LSI-290E, 310E,
330E and 360E.**

	LSI-230E	LSI-260E	LSI-290E	LSI-310E	LSI-330E	LSI-360E
Color	Lt. Gray	White or Lt. Gray	White or Lt. Gray	White or Lt. Gray	Lt. Gray	Lt. Gray
Length	7'7" (230 cm)	8'6" (260 cm)	9'6" (290 cm)	10'2" (310 cm)	10'8" (325 cm)	11'10" (360 cm)
Inside Length	5'1" (155 cm)	6'1" (185 cm)	6'9" (205 cm)	7'3" (220 cm)	7'5" (226 cm)	8'10" (268 cm)
Beam	4'9" (144 cm)	4'9" (144 cm)	5'2" (158 cm)	5'2" (158 cm)	5'6" (168 cm)	5'6" (168 cm)
Inside Beam	2'2" (66 cm)	2'2" (66 cm)	2'4" (72 cm)	2'4" (72 cm)	2'7" (78 cm)	2'7" (78 cm)
Tube Diameter	15.5" (39 cm)	15.5" (39 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)	18" (45 cm)
Weight	55 lbs (25 kg)	64 lbs (29 kg)	77 lbs (35 kg)	80 lbs (36.5 kg)	86 lbs (39 kg)	108 lbs (49 kg)
Load Capacity	710 lbs (320 kg)	820 lbs (370 kg)	1120 lbs (510 kg)	1210 lbs (550 kg)	1340 lbs (610 kg)	1520 lbs (690 kg)
Person Capacity	2	4*	4	4	5	6
Recommended H.P.	4 (2-4) Standard	4 (2-6) Standard	6 (4-8) Standard	8 (4-10) Standard	10 (4-15) Standard	20 (4-25) Standard
Maximum H.P.	4	6	8	10	15	25
Air Chambers	2 & Keel & Floor	2 & Keel & Floor	2 & Keel & Floor	3 & Keel & Floor	3 & Keel & Floor	4 & Keel & Floor

LSI STANDARD FEATURES INCLUDE: Achilles CSM-reinforced fabric; four-layer seam construction; removable Achilles CSM high-pressure drop stitch air floor; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; full length teardrop rubbing strake; bow carry handle and towing D-rings; interior bow lifting D-ring (except LSI-230E); removable wood rowing seat; bailer valve; high volume/high pressure foot pump with pressure gauge; protective pad for gas tank; fiberglass encased v-shaped transom (except LSI-230E which has a painted wood transom); air keel; extra seat attachment patches on LSI-290E, LSI-310E, LS-1330E and LSI-360E; carry bag; and maintenance kit. LSI-230E, LSI-260E, LSI-290E, and LSI-310E have stern mounted strap lift and carry handles. The LSI-330E and LSI-360E have rear molded lift and carry handles. All models have a fabric helmsman grip except the LSI-360 which has a molded rubber helmsman grip. *See pages 17 and 18.

HB-AL



We've incorporated all the best features of our pacesetter HB fiberglass hull inflatable boats into the new HB-310AL. This new model features a marine grade aluminum hull that is powder-coated to ensure a smooth, long lasting finish. It offers the advantage of being lightweight yet remarkably strong and durable. Because it is light-weight and incorporates a modified V hull, it requires less horsepower to cut through water efficiently.

The HB-310AL also features a full-length deck liner with non-skid panels to provide superior traction and also keep feet dry. This is in addition to a host of other great features perfected by Achilles through our years as a leader in inflatable technology.

The HB-310AL is a great choice for boaters who want a fuel-efficient and well-performing RIB that can handle rocky coastlines, coral, frequent beaching and anything else you can throw at it.

Our first Aluminum Hull RIB let's you go anywhere.



HB310-AL



HB-310AL	
Color	Pearl Gray
Length	10'2" (310 cm)
Inside Length	7'3" (220 cm)
Beam	5'2" (158 cm)
Inside Beam	2'4" (72 cm)
Tube Diameter	17" (43 cm)
Weight	121 lb (55 kg)
Load Capacity	1,190 lbs (540 kg)
Person Capacity	4
Recommended H.P.	10 (4-15) Standard
Maximum H.P.	15 Standard
Air Chambers	3

HB-AL STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four layer seam construction; powder-coated aluminum hull with full deck liner and non-skid patches; hull keel guard; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; interior oar straps; full length teardrop rubbing strake; D-rings for towing bridle; welded bow eye; inside bow davit lifting eye; stern mounted davit lifting eyes; transom towing eyes; protective transom motor clamp plate; bow and stern carry handles; webbed passenger handles and helmsman handles; removable wood rowing seat (gray painted); extra seat attachment patches; bailer valve; foot pump; and maintenance kit.

An innovative folding transom makes these lightweight RIB's the easiest to transport, carry, and launch

RIGID HULL
SERIES

HB-FX



The Achilles HB-FX boats feature a unique folding transom, lightweight design, and full-length padded carry bag that combine to make these rigid hull models the easiest to transport and launch. Despite their lighter weight, both these popular FX models offer large load capacities and the ability to carry four people. The Achilles HB-FX series offers boaters the most convenient RIB's available.

	HB-270FX	HB-300FX
Color	Pearl Gray	Pearl Gray
Length	8'10" (270 cm)	9'10" (300 cm)
Inside Length	5'11" (180 cm)	6'9" (205 cm)
Beam	5'1" (156 cm)	5'4" (162 cm)
Inside Beam	2'3" (70 cm)	2'4" (72 cm)
Tube Diameter	17" (43 cm)	18" (45 cm)
Weight	86 lbs (39 kg)	91 lbs (41.5 kg)
Load Capacity	1,010 lbs (460 kg)	1,260 lbs (570 kg)
Person Capacity	4	4
Recommended H.P.	6 (4-8) Standard	8 (4-10) Standard
Maximum H.P.	8 Standard	10 Standard
Air Chambers	3	3

HB-FX STANDARD FEATURES INCLUDE: Pearl Gray Achilles CSM reinforced fabric; four-layer seam construction; modified "V" fiberglass hull; folding fiberglass transom; deluxe full length carry bag; full length teardrop rubbing strake; D-rings for towing bridle; stainless steel bow eye; inside bow davit lifting eye; bow and stern carry handles; grab handles; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; interior oar straps (HB-300FX only); gas tank tie down hardware; protective transom motor clamp plate; removable wood rowing seat; extra seat attachment patches (HB-300FX only); bailer valve; foot pump; and maintenance kit.



HB-300FX



HB-270FX

DELUXE CARRY BAG IS STANDARD.

EASY TO FOLD AND STORE

HB-LX



The Achilles HB-LX boats provide the critically acclaimed performance of the Achilles DX deep “V” fiberglass hull design in a lighter RIB. They also have the same tube design as the DX series, yet a modification of the deck design and removing the bow locker results in a RIB that is on average 20% lighter than the same size DX model.

This means they can perform well with smaller engines and can be carried or transported more easily. Despite their lighter weight and lower cost compared to the HB-DX series, they are still loaded with all the high quality standard features for which Achilles is known.

A lightweight rigid hull series packed with high performance features.



HB280-LX



HB240-LX



HB350-LX



	HB-240LX	HB-280LX	HB-315LX	HB-350LX
Color	Pearl Gray	Pearl Gray	Pearl Gray	Pearl Gray
Length	7'10" (240 cm)	9'2" (280 cm)	10'4" (315 cm)	11'6" (350 cm)
Inside Length	5'8" (172 cm)	6'7" (201 cm)	7'9" (235 cm)	8'8" (264 cm)
Beam	5' (153 cm)	5'5" (166 cm)	5'5" (166 cm)	5'9" (175 cm)
Inside Beam	2'5" (73 cm)	2'7" (80 cm)	2'7" (80 cm)	2'9" (85 cm)
Tube Diameter	16" (40 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)
Weight	86 lbs (39 kg)	118 lbs (53.5 kg)	128 lbs (58 kg)	161 lbs (73 kg)
Load Capacity	900 lbs (410 kg)	1,210 lbs (550 kg)	1,320 lbs (600 kg)	1,680 lbs (760 kg)
Person Capacity	3	4	5	6
Recommended H.P.	5 (2-5) Standard	8 (4-10) Standard	10 (4-15) Standard	15 (6-20) Standard
Maximum H.P.	5 Standard	10 Standard	15 Standard	20 Standard
Air Chambers	2	3	3	3

HB-LX STANDARD FEATURES INCLUDE: Pearl Gray Achilles CSM reinforced fabric; four-layer seam construction; deep “V” fiberglass hull; full length teardrop rubbing strake; removable wood rowing seat; D-rings for towing bridle; stainless bow eye; lifting hardware for davits; grab handles; bow and stern carry handles; interior oar straps (except HB240-LX); fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; gas tank tie down hardware; protective transom motor clamp plate; extra seat attachment patches (except HB240-LX); bailer valve; foot pump; and maintenance kit.

These deluxe hard bottom inflatables offer boaters the best combination of style, performance, and functionality.

RIGID HULL
SERIES

HB-DX



Sleek, Euro-style tubes give them a stylish edge over other RIB's. A deep "V" fiberglass hull delivers superior performance while a built-in bow locker provides both a seat and a place for gear. If you want to take a step above the norm in a hard-bottomed tender, step up to an Achilles HB-DX RIB. Like every Achilles boat they are made with our own Achilles CSM fabric so they can handle the burning sun of the tropics or cold northern waters without fading or deteriorating. Choose a rigid-hulled inflatable that gives you a little extra. Choose an Achilles HB-DX.



A deep "V" fiberglass hull takes Achilles RIBs to an even higher level of performance.



	HB-280DX	HB-315DX	HB-350DX	HB-385DX
Color	Pearl Gray	Pearl Gray	Pearl Gray	Pearl Gray
Length	9'2" (280 cm)	10'4" (315 cm)	11'6" (350 cm)	12'8" (385 cm)
Inside Length	6'7" (201 cm)	7'9" (235 cm)	8'8" (264 cm)	9'10" (300 cm)
Beam	5'5" (166 cm)	5'5" (166 cm)	5'9" (175 cm)	5'11" (180 cm)
Inside Beam	2'7" (80 cm)	2'7" (80 cm)	2'9" (85 cm)	2'11" (90 cm)
Tube Diameter	17" (43 cm)	17" (43 cm)	18" (45 cm)	18" (45 cm)
Weight	148 lbs (67 kg)	159 lbs (72 kg)	187 lbs (85 kg)	243 lbs (110 kg)
Load Capacity	1,190 lbs (540 kg)	1,300 lbs (590 kg)	1,650 lbs (750 kg)	1,790 lbs (810 kg)
Person Capacity	4	5	6	7
Recommended H.P.	10 (4-15) Standard	15 (6-20) Standard	20 (6-30) Long	30 (20-40) Long
Maximum H.P.	15 Standard	20 Standard	30 Long	40 Long
Air Chambers	3	3	3	4

HB-DX STANDARD FEATURES INCLUDE: Pearl Gray Achilles CSM reinforced fabric; four-layer seam construction; deep "V" fiberglass hull; bow locker; double heavy duty full length teardrop rubbing strake; extra seat attachment patches; helmsman grip; removable wood rowing seat; D-rings for towing bridle; stainless bow eye; lifting hardware for davits; lift and carry handles; grab handles; interior oar straps; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders (HB-385DX has paddle); gas tank tie down hardware; protective transom motor clamp plate; bailer valve; foot pump; and maintenance kit.

FRB



A versatile utility boat that's ready to go in minutes.



Designed originally as quick response boats for fire departments and rescue units, these unique aluminum roll up floors with an innovative hinge system and non-skid panels can perform a variety of functions. They are easy to store or carry and can be set up in minutes. The main air chambers are equipped with over pressure relief valves. They can be inflated either by compressed air bottles or the standard equipment foot pump.

In addition to their Achilles CSM fabric and four-layer seam construction, other special features like abrasion wear patches and removable storage bags make them practical alternatives for tackling a range of jobs on the water.



FRB-124




FRB-124

	FRB-104	FRB-124
Color	Red	Red
Length	10'4" (315 cm)	12'4" (375 cm)
Inside Length	7'3" (220 cm)	8'11" (272 cm)
Beam	5'2" (158 cm)	5'3" (161 cm)
Inside Beam	2'4" (72 cm)	2'6" (75 cm)
Tube Diameter	17" (43 cm)	17" (43 cm)
Weight	108 lbs (49 kg)	154 lbs (70 kg)
Load Capacity	1,210 lbs (550 kg)	1,480 lbs (670 kg)
Person Capacity	4	5
Recommended H.P.	10 (4-15) Standard	15 (4-25) Standard
Maximum H.P.	15 Standard	25 Standard
Air Chambers	2 + Keel	4 + Keel

FRB STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; deep "V" inflatable keel; aluminum roll-up floor with non-skid panels, fiberglass encased v-shaped transom with protective motor clamp plate; two (2) paddles with interior tie downs; two removable storage bags; full length splash guard with life lines; abrasion patches; five (5) interior tie-down D-rings; full-length teardrop rubbing strake; foot pump and maintenance kit. The FRB-104 has two (2) over pressure relief valves, four lift and carry handles, interior bow lifting D-ring and bailer valve. The FRB-124 has four (4) over pressure relief valves, six (6) lift and carry handles, two (2) bailer valves and heavy duty bailer sleeve.

SGX

These versatile aluminum and wood-floored boats are the perfect solution for a range of uses.

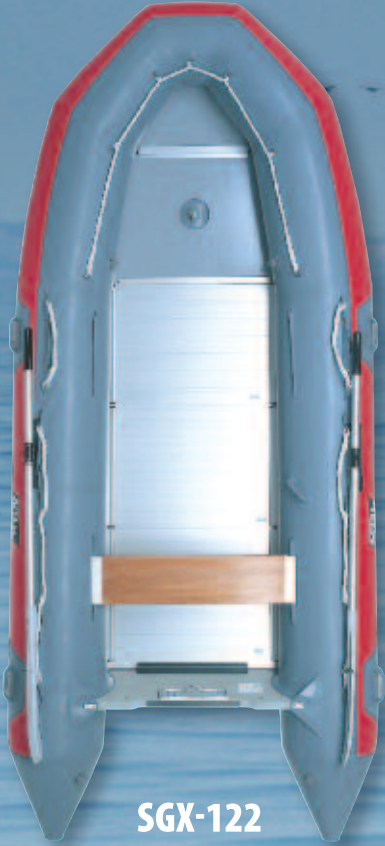

SGX-122



They are rugged and roomy so they can be put to the test as dive boats, heavy duty tenders or utility boats. Their sporty nature also makes them great runabouts that really perform thanks to their deep “V” inflatable keel and large tube diameters.

A range of quality features include a v-shaped fiberglass-encased transom and removable, dual position wood seat. Their Achilles CSM fabric and four-layer seam construction make these sport boats extremely tough... and tough to beat.

The aluminum floor and v-shaped fiberglass-encased transom enhance durability and performance, and decrease maintenance.

	SGX-122	SGX-132
Color	Red/Gray	Red/Gray
Length	12'2" (365 cm)	13'2" (400 cm)
Inside Length	8'10" (268 cm)	9'4" (284 cm)
Beam	5'6" (168 cm)	5'9" (175 cm)
Inside Beam	2'7" (78 cm)	2'9" (85 cm)
Tube Diameter	18" (45 cm)	18" (45 cm)
Weight	167 lbs (76 kg)	187 lbs (85 kg)
Load Capacity	1,520 lbs (690 kg)	1,760 lbs (800 kg)
Person Capacity	6	6
Recommended H.P.	20 (6-35) Standard	30 (9.9-40) Long
Maximum H.P.	35 Standard	40 Long
Air Chambers	4 & Keel	4 & Keel

SGX STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; aluminum and wood floorboards with aluminum stringer system; v-shaped fiberglass encased transom; full-length teardrop rubbing strake; deep “V” inflatable keel; towing bridle D-rings; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; bow handle; four (4) lift and carry handles; helmsman grip; two (2) bailer valves; gas tank tie downs; lifelines; removable wood seat; extra seat attachment patches; high-volume foot pump; two carry bags; and maintenance kit.



SGX-132

SG



Achilles SG boats offer a roomy, square bow configuration which provides room for extra gear, and an aluminum and fiberglass floor system* which delivers superior rigidity and durability. Achilles SG Sportboats bring performance and practicality together for better diving, fishing, or all-around sport-boating pleasure. They are also perennial rescue and emergency boat favorites of fire departments, first responders and others around the world.



SG-140



	SG-124	SG-140	SG-156
Color	Red	Red	Red
Length	12'4" (375 cm)	14' (425 cm)	15'6" (473 cm)
Inside Length	8'11" (272 cm)	10' (305 cm)	10'11" (333 cm)
Beam	5'3" (161 cm)	5'9" (175 cm)	6'3" (190 cm)
Inside Beam	2'6" (75 cm)	2'9" (85 cm)	2'11" (90 cm)
Tube Diameter	17" (43 cm)	18" (45 cm)	20" (50 cm)
Weight	175 lbs (79.5 kg)	226 lbs (102.5 kg)	272 lbs (123.5 kg)
Load Capacity	1,460 lbs (660 kg)	1,940 lbs (880 kg)	2,800 lbs (1,270 kg)
Person Capacity	5	6	8
Recommended H.P.	20 (6-35) Standard	30 (9.9-50) Long	35 (9.9-55) Long
Maximum H.P.	35 Standard	50 Long	55 Long
Air Chambers	4 & Keel	4 & Keel	5 & Keel

SG STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; air keel; aluminum and fiberglass* floorboards with aluminum stringer system; fiberglass encased transom with protective motor clamp plate; fuel tank tie-downs; two (2) bailer valves; full-length teardrop rubbing strake; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders (except SG-156); bow carry handle; lift and carry handles; towing bridle D-rings; helmsman grip; full-length splash guard with life lines; removable wood seat (except SG-156); extra seat attachment patches; large, high-volume foot pump; double carry bag system; and maintenance kit.

*SG-124 floorboards are aluminum and wood.

SU

**Built tough to work hard
for rugged private and
commercial use.**



*Seat, console and arch show
are custom dealer options.*



SU boats are made with an additional heavy-duty layer of 840-denier nylon Achilles CSM fabric in a two-ply technique which results in a fabric even stronger than a single base fabric of equal thickness. A number of commercial grade features such as recessed valves and a full-length, protective wear patch combine to make these boats the right choice for the toughest marine uses.

	SU-14	SU-16	SU-18
Color	Gray, Black*	Gray, Black*	Gray, Black*
Length	14' (425 cm)	16' (488 cm)	18' (549 cm)
Inside Length	9'4" (284 cm)	10'10" (330 cm)	12' (366 cm)
Beam	5'10" (178 cm)	6'9" (206 cm)	7'7" (230 cm)
Inside Beam	2'8" (82 cm)	3'3" (100 cm)	3'7" (110 cm)
Tube Diameter	19" (48 cm)	21" (53 cm)	24" (60 cm)
Weight	280 lbs (127 kg)	371 lbs (168.5 kg)	433 lbs (196 kg)
Load Capacity	2,230 lbs (1,010 kg)	3,170 lbs (1,440 kg)	4,630 lbs (2,100 kg)
Person Capacity	6	9	11
Recommended H.P.	35 (9.9-55) Long	40 (20-75) Long	50 (25-90) Long
Maximum H.P.	55 Long	75 Long	90 Long
Air Chambers	4 + Keel	5 + Keel	5 + Keel

**International Orange available as special order only*

SU STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; extra durable double layer (840 denier each) nylon core fabric; air keel; aluminum and fiberglass floorboards and heavy duty aluminum stringer system; fiberglass encased transom with aluminum plate and motor pad; fuel tank tie-downs; heavy duty bailer sleeve and two (2) bailer valves; extra-wide, heavy-duty, full-length teardrop rubbing strake; tie-down straps for paddles; bow handle; towing bridle D-rings; lift and carry handles; splash guard with life lines; heavy-duty reinforced cargo wear patch all around; extra tie-down D-rings; heavy duty recessed valves; heavy duty lifting points (hull and transom); two (2) high-volume large foot pumps; and maintenance kit.



SU-16



**Heavy-duty bailer and
aluminum-plated transom**

*Seat and paddle shown are
optional equipment.*



SU-16

SPECIFICATIONS FOR 2015 ACHILLES BOATS

NEW AIR KEEL

NEW FOR 2015

MODEL	DINGHIES				SPORT TENDERS														HB310-AL	
	LT-2	LT-4	LS2-RU	LS4-RU	LEX-77	LEX-88	LEX-96	LSR-290E	LSR-310E	SPD-290E	SPD-310E	SPD-330E	LSI-230E	LSI-260E	LSI-290E	LSI-310E	LSI-330E	LSI-360E		
LENGTH	7'3" (220 cm)	8'6" (260 cm)	7'6" (228 cm)	8'8" (265 cm)	7'7" (230 cm)	8'8" (265 cm)	9'6" (290 cm)	9'6" (290 cm)	10'2" (310 cm)	9'6" (290 cm)	10'2" (310 cm)	10'8" (325 cm)	7'7" (230 cm)	8'6" (260 cm)	9'6" (290 cm)	10'2" (310 cm)	10'8" (325 cm)	11'10" (360 cm)	10'2" (310 cm)	
INSIDE LENGTH	5' (153 cm)	6'2" (188 cm)	5'1" (156 cm)	6'1" (185 cm)	4'11" (149 cm)	5'11" (180 cm)	6'9" (205 cm)	6'9" (205 cm)	7'3" (220 cm)	6'9" (205 cm)	7'3" (220 cm)	7'5" (226 cm)	5'1" (155 cm)	6'1" (185 cm)	6'9" (205 cm)	7'3" (220 cm)	7'5" (226 cm)	8'10" (268 cm)	7'3" (220 cm)	
BEAM	4'1" (124 cm)	4'8" (142 cm)	4'4" (132 cm)	4'8" (142 cm)	4'9" (144 cm)	4'9" (144 cm)	4'9" (144 cm)	5'2" (158 cm)	5'2" (158 cm)	5'2" (158 cm)	5'2" (158 cm)	5'6" (168 cm)	4'9" (144 cm)	4'9" (144 cm)	5'2" (158 cm)	5'2" (158 cm)	5'6" (168 cm)	5'6" (168 cm)	5'2" (158 cm)	
INSIDE BEAM	1'11" (58 cm)	2'2" (66 cm)	2' (62 cm)	2'2" (66 cm)	2'2" (66 cm)	2'2" (66 cm)	2'2" (66 cm)	2'4" (72 cm)	2'4" (72 cm)	2'4" (72 cm)	2'4" (72 cm)	2'7" (78 cm)	2'2" (66 cm)	2'2" (66 cm)	2'4" (72 cm)	2'4" (72 cm)	2'7" (78 cm)	2'7" (78 cm)	2'4" (72 cm)	
TUBE	13" (33 cm)	15" (38 cm)	14" (35 cm)	15" (38 cm)	15.5" (39 cm)	15.5" (39 cm)	15.5" (39 cm)	17" (43 cm)	17" (43 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)	15.5" (39 cm)	15.5" (39 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)	18" (45 cm)	17" (43 cm)	
HP RATING <small>(Recommended/Range)</small>	3 (2-3) standard	3 (2-3) standard	4 (2-4) standard	4 (2-6) standard	4 (2-4) standard	4 (2-6) standard	6 (4-8) standard	6 (4-8) standard	8 (4-10) standard	6 (4-8) standard	8 (4-10) standard	15 (6-20) standard	4 (2-4) standard	4 (2-6) standard	6 (4-8) standard	8 (4-10) standard	10 (4-15) standard	20 (4-25) standard	10 (4-15) Standard	
MAX ENGINE WEIGHT	44 lbs (20 kg)	44 lbs (20 kg)	55 lbs (25 kg)	66 lbs (30 kg)	55 lbs (25 kg)	66 lbs (30 kg)	88 lbs (40 kg)	88 lbs (40 kg)	110 lbs (50 kg)	88 lbs (40 kg)	110 lbs (50 kg)	121 lbs (55 kg)	55 lbs (25 kg)	66 lbs (30 kg)	88 lbs (40 kg)	110 lbs (50 kg)	110 lbs (50 kg)	154 lbs (70 kg)	110 lbs (50 kg)	
HULL WEIGHT	29 lbs (13 kg)	37 lbs (17 kg)	40 lbs (18 kg)	46 lbs (21 kg)	45 lbs (20.5 kg)	49 lbs (22 kg)	52 lbs (23.5 kg)	66 lbs (30 kg)	68 lbs (31 kg)	66 lbs (30 kg)	68 lbs (31 kg)	73 lbs (33 kg)	47 lbs (21.5 kg)	55 lbs (25 kg)	66 lbs (30 kg)	68 lbs (31 kg)	73 lbs (33 kg)	86 lbs (39 kg)	121 lbs (55 kg)	
FLOOR WEIGHT	8 lbs (3.5 kg)	20 lbs (9 kg)	17 lbs (7.5 kg)	20 lbs (9 kg)	17 lbs (7.5 kg)	20 lbs (9 kg)	22 lbs (10 kg)	31 lbs (14 kg)	33 lbs (15 kg)	40 lbs (18 kg)	42 lbs (19 kg)	47 lbs (21.5 kg)	8 lbs (3.5 kg)	9 lbs (4 kg)	11 lbs (5 kg)	12 lbs (5.5 kg)	13 lbs (6 kg)	22 lbs (10 kg)	— —	
BOAT WEIGHT	37 lbs (16.5 kg)	57 lbs (26 kg)	57 lbs (25.5 kg)	66 lbs (30 kg)	62 lbs (28 kg)	69 lbs (31 kg)	74 lbs (33.5 kg)	97 lbs (44 kg)	101 lbs (46 kg)	106 lbs (48 kg)	110 lbs (50 kg)	120 lbs (54.5 kg)	55 lbs (25 kg)	64 lbs (29 kg)	77 lbs (35 kg)	80 lbs (36.5 kg)	86 lbs (39 kg)	108 lbs (49 kg)	121 lbs (55 kg)	
ACCESSORIES WEIGHT	12 lbs (5.5 kg)	17 lbs (7.5 kg)	12 lbs (5.5 kg)	12 lbs (5.5 kg)	15 lbs (7 kg)	12 lbs (5.5 kg)	12 lbs (5.5 kg)	18 lbs (8 kg)	18 lbs (8 kg)	18 lbs (8 kg)	18 lbs (8 kg)	19 lbs (8.5 kg)	17 lbs (7.5 kg)	17 lbs (7.5 kg)	18 lbs (8 kg)	18 lbs (8 kg)	18 lbs (8 kg)	18 lbs (8 kg)	18 lbs (8 kg)	14 lbs (6.5 kg)
TOTAL WEIGHT	49 lbs (22 kg)	74 lbs (33.5 kg)	69 lbs (31 kg)	78 lbs (35.5 kg)	77 lbs (35 kg)	81 lbs (36.5 kg)	86 lbs (39 kg)	115 lbs (52 kg)	119 lbs (54 kg)	123 lbs (56 kg)	128 lbs (58 kg)	139 lbs (63 kg)	72 lbs (32.5 kg)	80 lbs (36.5 kg)	95 lbs (43 kg)	98 lbs (44.5 kg)	104 lbs (47 kg)	126 lbs (57 kg)	135 lbs (61.5 kg)	
LOAD CAPACITY	640 lbs (290 kg)	970 lbs (440 kg)	620 lbs (280 kg)	840 lbs (380 kg)	730 lbs (330 kg)	900 lbs (410 kg)	990 lbs (450 kg)	1100 lbs (500 kg)	1190 lbs (540 kg)	1100 lbs (500 kg)	1190 lbs (540 kg)	1300 lbs (590 kg)	710 lbs (320 kg)	820 lbs (370 kg)	1120 lbs (510 kg)	1210 lbs (550 kg)	1340 lbs (610 kg)	1520 lbs (690 kg)	1190 lbs (540 kg)	
PERSON CAPACITY	2	4*	2	4*	2	4*	4	4	4	4	4	5	2	4*	4	4	5	6	4	
NO. OF AIR CHAMBERS	2	2	2	2	2 & keel	2 & keel	2 & keel	3 & keel	3 & keel	2 & keel	3 & keel	3 & keel	2 & keel & floor	2 & keel & floor	2 & keel & floor	3 & keel & floor	3 & keel & floor	4 & keel & floor	3	
STOWED DIMENSIONS	33"x1'6"x9" (100 x 46 x 24)	33"x1'6"x11" (100 x 46 x 31)	35"x1'10"x10" (103 x 55 x 26)	35"x1'10"x10" (103 x 55 x 26)	35"x1'8"x11" (105 x 52 x 28)	34"x1'11"x11" (102 x 59 x 28)	35"x2'1"x11" (105 x 63 x 28)	39"x2'1"x13" (115 x 63 x 39)	39"x2'1"x13" (115 x 63 x 39)	39"x1'8"x11" (115 x 52 x 34)	39"x1'11"x11" (115 x 58 x 34)	8-4'1"x1'11"x10" (125 x 58 x 26)	3'5"x1'10"x11" (105 x 55 x 27)	3'5"x1'10"x11" (105 x 55 x 28)	3'9"x1'10"x1' (115 x 55 x 30)	4'2"x1'11"x1' (128 x 58 x 30)	4'1"x1'11"x10" (125 x 58 x 26)	4'2"x2'x12" (128 x 60 x 35)	98"x3'5"x1'6" (295 x 105 x 46)	

THE MAXIMUM HP RATING, PERSON CAPACITY AND LOAD CAPACITY HAVE BEEN CALCULATED ACCORDING TO THE STANDARDS OF ISO6185.

*3 PERSON CAPACITY ACCORDING TO NMMA CERTIFICATION STANDARDS. PERSONS OPERATING BOATS ALONE SHOULD EXERCISE CAUTION

SPECIFICATIONS FOR 2015 ACHILLES BOATS

RIGID HULLS										SPORT AND UTILITY										MODEL
HB270-FX	HB300-FX	HB240-LX	HB280-LX	HB315-LX	HB350-LX	HB280-DX	HB315-DX	HB350-DX	HB385-DX	FRB-104	FRB-124	SGX-122	SGX-132	SG-124	SG-140	SG-156	SU-14	SU-16	SU-18	
8'10" (270 cm)	9'10" (300 cm)	7'10" (240 cm)	9'2" (280 cm)	10'4" (315 cm)	11'6" (350 cm)	9'2" (280 cm)	10'4" (315 cm)	11'6" (350 cm)	12'8" (385 cm)	10'4" (315 cm)	12'4" (375 cm)	12'2" (365 cm)	13'2" (400 cm)	12'4" (375 cm)	14' (425 cm)	15'6" (473 cm)	14' (425 cm)	16' (488 cm)	18' (549 cm)	LENGTH
5'11" (180 cm)	6'9" (205 cm)	5'8" (172 cm)	6'7" (201 cm)	7'9" (235 cm)	8'8" (264 cm)	6'7" (201 cm)	7'9" (235 cm)	8'8" (264 cm)	9'10" (300 cm)	7'3" (220 cm)	8'11" (272 cm)	8'10" (268 cm)	9'4" (284 cm)	8'11" (272 cm)	10' (305 cm)	10'11" (333 cm)	9'4" (284 cm)	10'10" (330 cm)	12' (366 cm)	INSIDE LENGTH
5'1" (156 cm)	5'4" (162 cm)	5' (153 cm)	5'5" (166 cm)	5'5" (166 cm)	5'9" (175 cm)	5'5" (166 cm)	5'5" (166 cm)	5'9" (175 cm)	5'11" (180 cm)	5'2" (158 cm)	5'3" (161 cm)	5'6" (168 cm)	5'9" (175 cm)	5'3" (161 cm)	5'9" (175 cm)	6'3" (190 cm)	5'10" (178 cm)	6'9" (206 cm)	7'7" (230 cm)	BEAM
2'3" (70 cm)	2'4" (72 cm)	2'5" (73 cm)	2'7" (80 cm)	2'7" (80 cm)	2'9" (85 cm)	2'7" (80 cm)	2'7" (80 cm)	2'9" (85 cm)	2'11" (90 cm)	2'4" (72 cm)	2'6" (75 cm)	2'7" (78 cm)	2'9" (85 cm)	2'6" (75 cm)	2'9" (85 cm)	2'11" (90 cm)	2'8" (82 cm)	3'3" (100 cm)	3'7" (110 cm)	INSIDE BEAM
17" (43 cm)	18" (45 cm)	16" (40 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)	18" (45 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)	18" (45 cm)	17" (43 cm)	18" (45 cm)	20" (50 cm)	19" (48 cm)	21" (53 cm)	24" (60 cm)	TUBE
6 (4 - 8) standard	8 (4 - 10) standard	5 (2 - 5) standard	8 (4 - 10) standard	10 (4 - 15) standard	15 (6 - 20) standard	10 (4 - 15**) standard	15 (6 - 20) standard	20 (6 - 30) long	30 (20 - 40) long	10 (4 - 15) standard	15 (4 - 25) standard	20 (6 - 35) standard	30 (9.9 - 40) long	20 (6 - 35) standard	30 (9.9 - 50) long	35 (9.9 - 55) long	35 (9.9 - 55) long	40 (20 - 75) long	50 (25 - 90) long	HP RATING <small>(Recommended/Range)</small>
88 lbs (40 kg)	110 lbs (50 kg)	66 lbs (30 kg)	110 lbs (50 kg)	110 lbs (50 kg)	121 lbs (55 kg)	110 lbs (50 kg)	121 lbs (55 kg)	172 lbs (78 kg)	209 lbs (95 kg)	110 lbs (50 kg)	154 lbs (70 kg)	176 lbs (80 kg)	209 lbs (95 kg)	176 lbs (80 kg)	243 lbs (110 kg)	265 lbs (120 kg)	265 lbs (120 kg)	353 lbs (160 kg)	375 lbs (170 kg)	MAX ENGINE WEIGHT
86 lbs (39 kg)	91 lbs (41.5 kg)	86 lbs (39 kg)	118 lbs (53.5 kg)	128 lbs (58 kg)	161 lbs (73 kg)	148 lbs (67 kg)	159 lbs (72 kg)	187 lbs (85 kg)	243 lbs (110 kg)	75 lbs (34 kg)	108 lbs (49 kg)	99 lbs (45 kg)	112 lbs (51 kg)	106 lbs (48 kg)	122 lbs (55.5 kg)	151 lbs (68.5 kg)	172 lbs (78 kg)	231 lbs (105 kg)	265 lbs (120 kg)	HULL WEIGHT
— —	— —	— —	— —	— —	— —	— —	— —	— —	— —	33 lbs (15 kg)	46 lbs (21 kg)	68 lbs (31 kg)	75 lbs (34 kg)	69 lbs (31.5 kg)	104 lbs (47 kg)	121 lbs (55 kg)	108 lbs (49 kg)	140 lbs (63.5 kg)	168 lbs (76 kg)	FLOOR WEIGHT
86 lbs (39 kg)	91 lbs (41.5 kg)	86 lbs (39 kg)	118 lbs (53.5 kg)	128 lbs (58 kg)	161 lbs (73 kg)	148 lbs (67 kg)	159 lbs (72 kg)	187 lbs (85 kg)	243 lbs (110 kg)	108 lbs (49 kg)	154 lbs (70 kg)	167 lbs (76 kg)	187 lbs (85 kg)	175 lbs (79.5 kg)	226 lbs (102.5 kg)	272 lbs (123.5 kg)	280 lbs (127 kg)	371 lbs (168.5 kg)	433 lbs (196 kg)	BOAT WEIGHT
17 lbs (7.5 kg)	17 lbs (7.5 kg)	11 lbs (5 kg)	12 lbs (5.5 kg)	12 lbs (5.5 kg)	13 lbs (6 kg)	12 lbs (5.5 kg)	12 lbs (5.5 kg)	13 lbs (6 kg)	13 lbs (6 kg)	20 lbs (9 kg)	20 lbs (9 kg)	21 lbs (9.5 kg)	25 lbs (11.5 kg)	20 lbs (9 kg)	20 lbs (9 kg)	15 lbs (7 kg)	7 lbs (3 kg)	7 lbs (3 kg)	7 lbs (3 kg)	ACCESSORIES WEIGHT
103 lbs (.5 kg)	108 lbs (49 kg)	97 lbs (44 kg)	130 lbs (59 kg)	140 lbs. (63.5 kg)	174 lbs (79 kg)	160 lbs (72.5 kg)	171 lbs. (77.5 kg)	200 lbs (91 kg)	256 lbs (116 kg)	128 lbs (58 kg)	174 lbs (79 kg)	188 lbs (85.5 kg)	212 lbs (96.5 kg)	195 lbs (88.5 kg)	246 lbs (111.5 kg)	287 lbs (130.5 kg)	287 lbs (130 kg)	378 lbs (171.5 kg)	440 lbs (199 kg)	TOTAL WEIGHT
1010 lbs (460 kg)	1260 lbs (570 kg)	900 lbs (410 kg)	1210 lbs (550 kg)	1320 lbs (600 kg)	1680 lbs (760 kg)	1190 lbs (540 kg)	1300 lbs (590 kg)	1650 lbs (750 kg)	1790 lbs (810 kg)	1210 lbs (550 kg)	1480 lbs (670 kg)	1520 lbs (690 kg)	1760 lbs (800 kg)	1460 lbs (660 kg)	1940 lbs (880 kg)	2800 lbs (1270 kg)	2230 lbs (1010 kg)	3170 lbs (1440 kg)	4630 lbs (2100 kg)	LOAD CAPACITY
4	4	3	4	5	6	4	5	6	7	4	5	6	6	5	6	8	6	9	11	PERSON CAPACITY
3	3	2	3	3	3	3	3	3	4	2 & keel	4 & keel	4 & keel	4 & keel	4 & keel	4 & keel	5 & keel	4 & keel	5 & keel	5 & keel	NO. OF AIR CHAMBERS
6'11"x3'5"x1'1" (210 x 105 x 33)	7'9"x3'5"x1'1" (235 x 105 x 33)	7'5"x3'5"x1'6" (225 x 105 x 46)	8'8"x3'5"x6" (265 x 105 x 46)	9'8"x3'5"x1'6" (295 x 105 x 46)	10'10"x3'7"x1'8" (330 x 110 x 51)	8'8"x3'5"x1'6" (265 x 105 x 46)	9'8"x3'5"x1'6" (295 x 105 x 46)	10'10"x3'7"x2'1" (330 x 110 x 63)	11'10"x3'11"x2'2" (360 x 120 x 65)	4'1"x2'1"x1'3" (125 x 63 x 39)	4'5"x2'6"x2" (135 x 75 x 60)	B-4'2"x2'x1' (128 x 60 x 30) F-3'1"x2'2"x7" (93 x 67 x 17)	B-4'3"x2"x1'2" (130 x 61 x 35) F-3'5"x2'5"x7" (105 x 74 x 17)	B-4'1'2"x1'2" (125 x 67 x 36) F-3'1"x2'2"x6" (93 x 67 x 16)	B-4'6"x2'2"x1'2" (137 x 67 x 36) F-3'5"x2'6"x8" (104 x 75 x 20)	B-5'x2'4"x1'2" (152 x 71 x 36) F-3'7"x2'6"x8" (110 x 76 x 20)	B-5'4"x2'5"x1'5" (162 x 74 x 42) F-3'4"x2'6"x8" (101 x 75 x 20)	B-5'10"x2'10"x1'4" (178 x 87 x 40) F-3'11"x2'9"x8" (120 x 85 x 20)	B-6'3"x3'3"x1'4" (190 x 98 x 40) F-4'4"x3'1"x8" (133 x 95 x 20)	STOWED DIMENSIONS

WHEN USING MAXIMUM HP ENGINES.

**15 H.P. MAX. WITH REMOTE STEERING; 10 H.P. WITH TILLER STEERING



ACHILLES INFLATABLE BOATS

A Division of Achilles USA, Inc.

1407 80th Street SW
Everett, WA 98203
Email: boats@achillesusa.com
www.achillesboats.com

EAST COAST SALES OFFICE:
(252) 288-4387

WEST COAST SALES OFFICE:
(951) 587-8101

MANUFACTURED BY:
Achilles Corporation
21F, No. 2-21-1, Kitashinjuku,
Shinjuku-ku
Tokyo, Japan 169-8885
Phone: (03) 3225-2187
Fax: (03) 3351-6963



Achilles boats are certified by the National Marine Manufacturers Association as adhering to federal regulations and rigid industry standards established by the U.S. Coast Guard and the American Boat & Yacht Council. Achilles boats must pass rigorous annual inspections from independent third party inspectors to maintain this prestigious certification that guarantees our boats meet the highest safety and production standards. Achilles boats are also manufactured to meet or exceed ISO6185 standards.



Visit us on Facebook
facebook.com/Achilles.Inflatable.Boats

Specifications of Achilles boats may change without notice. Always follow manufacturer's recommendations for boats and engines. Achilles recommends the use of a personal flotation device or life jacket when boating.

EUROPEAN AGENT:
Wendt Agenturen B.V.
Achter de Watertoren 11
2182 DV Hillegom
The Netherlands
Phone: +31 (0) 252 516 938
Fax: +31 (0) 252 830 256
Email: info@achilles-wendt.com

NORWAY DISTRIBUTOR:
AS Kellox
Nygårdsveien 67
N-1401 Ski
Norway
Phone: (47) 64 97 61 00
Fax: (47) 64 97 6190
Email: achilles@kellox.no



AUSTRALIAN DISTRIBUTOR:
BURSILL SPORTSGEAR
(Holdings) Pty. Ltd.
16 Vine Street
Redfern N.S.W. 2016
Australia
Phone: (61) 2 9698 8022
Fax: (61) 2 9698 5708
Email: grahambursill@bigpond.com
www.inflatableboats.com.au

